


MULTIMAX US

POWERED BY INNOVATION



MULTIMAX US

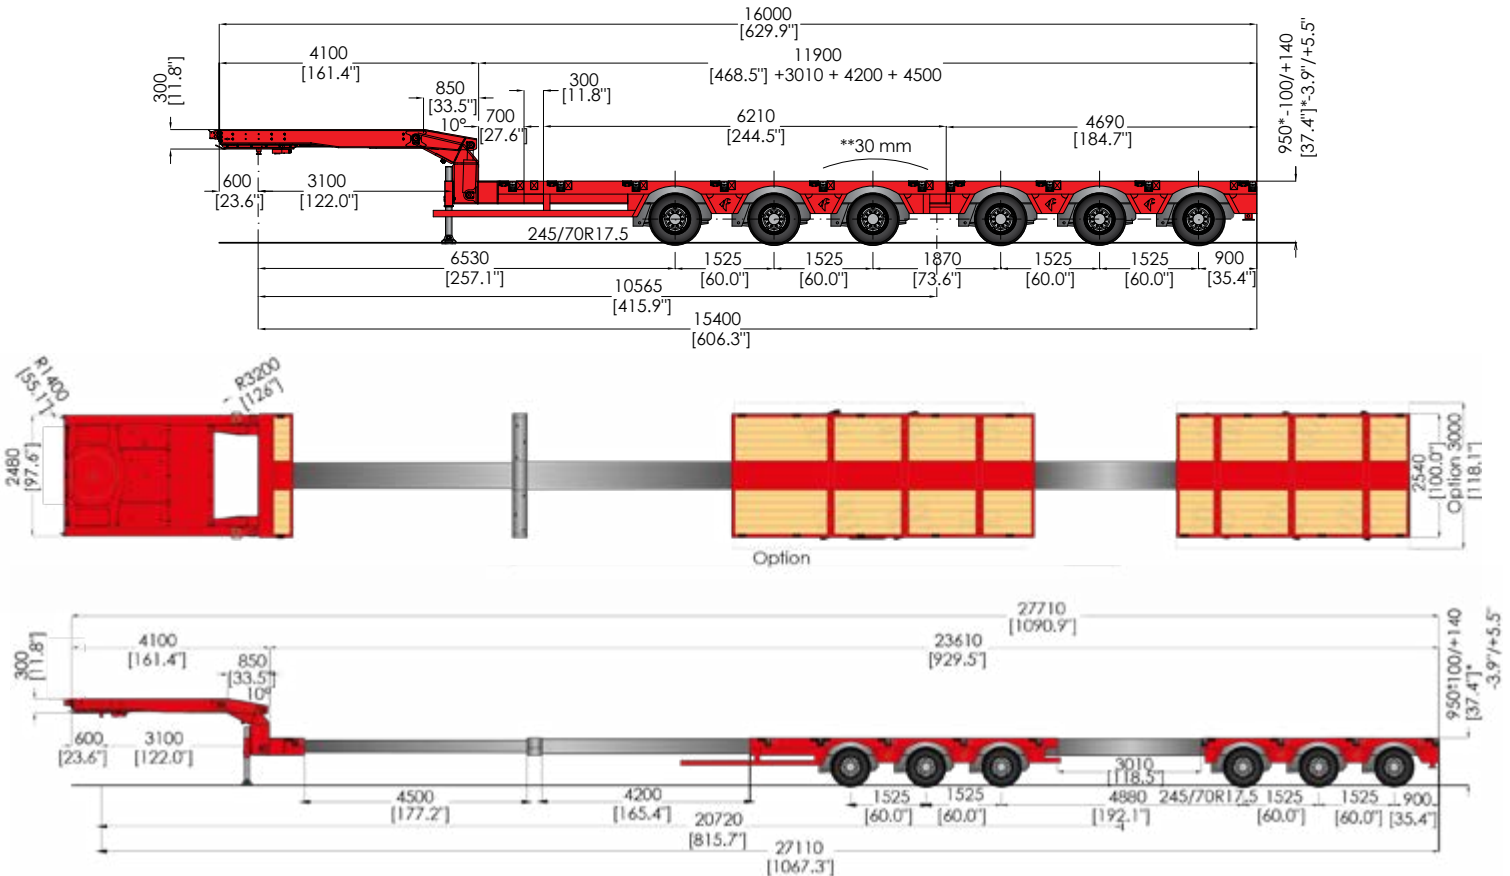

Multi-NZ-6(3+3)L-W-AA-26/32AT-12.00-17.5-2.54-US

- ⊕ Front bogie with caster steered axles able to work in counter-steering
- ⊕ Rear bogie fully king-pin steered
- ⊕ Optimal load transfer via air ride
- ⊕ Hydraulic lifting and lowering of the neck for best ground clearance
- ⊕ Flexible spacing between axle tridem - 14'1" or 16'1"
- ⊕ Complete trailer closed within 53'
- ⊕ Stretches up to 77' in the well (+13' gooseneck)
- ⊕ 37" of loading height
- ⊕ Closed loading platform for versatile usage
- ⊕ Lowest dead weight for maximum payload
- ⊕ Simple-to-use and robust technology for quick and easy handling
- ⊕ Rail at trailer rear for removable ramps